

Work Order ID 143816

143816

Page 1

Thursday, March 24, 2016 9:02:32 AM

Item ID: D4384-1

Accept

N900040100

Setup Start ***NS1***

Revision ID:

Stop ***NS2***

Item Name: Placard

Start Date: 3/28/2016 Start Qty: 18.00

18

Cust Item ID:

Required Date: 4/8/2016 Req'd Qty: 18.00

18

Customer:

Reference:

Approvals: Process Plan: W Date: _____ Tooling: _____ Date: _____
QC: _____ Date: _____ SPC (Y/N): _____ Date: _____

Run Start ***NR1***

Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
--------------------------------	--------------------------	----------------------	---------	--------	--------------	---------------	---------------	------------------	----------------

Draw Nbr	Revision Nbr
D4384	A

100

0.00

100

Purchasing

Purchasing

Memo

Issue P/O: 31817
Manufacture as per Dwg D4384
Possible Supplier: Studio Lettrage
Material release note required

0.00

MAR 24 2016

DAS
13
9-89

110

Receive & Inspect for Damage & Mat'l Certs

0.00

110

Packaging

Packaging

Memo

0.01

18x 5016-4-02

120

QC6- Inspect dimensions to drawing

0.00

120

QC

Quality Control

Memo

0.00

18

DAS
38
9-89

APR 02 2016

Work Order ID 143816***143816***

Page 2

Thursday, March 24, 2016 9:02:32 AM

Item ID: D4384-1 Accept ***N900040100*** Setup Start ***NS1***
Revision ID: Stop ***NS2***
Item Name: Placard
Start Date: 3/28/2016 Start Qty: 18.00 ***18*** Cust Item ID:
Required Date: 4/8/2016 Req'd Qty: 18.00 ***18*** Customer:
Reference:

Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____ Run Start ***NR1***
QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
130	Identify as per dwg & Stock Location: <u>Stops</u>	0.00				18			DAS 6 9.89
130									
Packaging	Memo	0.00							
Packaging	***ONE YEAR EXPIRED DATE FROM RECEIVING: _____***								
	APR 02 2017								
140	QC21- Final Inspection - Work Order Release	0.00							
140									
QC	Memo	0.03							
Quality Control									

MLJ APR 05 2016

MLJ APR 04 2016

Picklist Print

Thursday, March 24, 2016 9:02:32 AM

Page 1

Work Order ID: 143816

143816

Parent Item: D4384-1

D4384-1

Parent Item Name: Placard

Start Date: 3/28/2016

Required Date: 4/8/2016

Start Qty: 18.00

Required Qty: 18.00


Comments: IPP REV:A NEW ISSUE 11-06-05 JLM VERIFIED BY:DD

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D4384-1P		Purchased	No				Each	0.0000		18			
D4384-1P									**				
Placard													

18x 8/0/6-04-02

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER

143816 MJS
1603-23

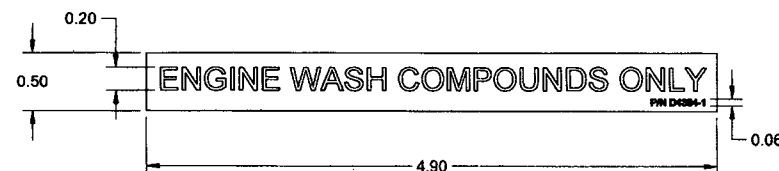

D4384-1 PLACARD

RELEASED
2011-06-30
MM

NOTES:

- 1) MATERIAL: MANUFACTURE FROM 3M 7 MIL MASKING FILM #8522CP OR AVERY IPM #2031
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: N/A
- 6) IDENTIFICATION: NONE
- 7) WEIGHT: N/A
- 8) RED LETTERS ON WHITE BACKGROUND AND SELF-ADHESIVE BACK

A		NEW ISSUE		RF	11.03.31
REV.	DESCRIPTION			BY	DATE
DESIGN	DS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA			
DRAWN	RF				
CHECKED	RF	DRAWING NO.	REV. A		
MFG. APPR.	RF	D4384	SHEET 1 OF 1		
APPROVED	RF	TITLE	SCALE		
DE APPR.	RF	PLACARD	NT.		
DATE	11.03.31	COPYRIGHT © 2011 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD			



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
Tel: 613 632 9577
Fax: 613 632 1053

PURCHASE ORDER

Purchase Order ID **PO31817**

Purchase Order Date 3/24/2016

PO Print Date 3/29/2016

Page Number 3 of 3

Order From :

VC-STU001

Ship To : DART AEROSPACE LTD

STUDIO DE LETTRAGE 2001
210 MAIN WEST
HAWKESBURY, ON K6A 2H6
CA

1270 ABERDEEN
HAWKESBURY, ON K6A 1K7
CANADA

Contact Name

Vendor Phone

613 632 5449

Ship To Contact

Ship To Phone

Ship Via:

Customer Pick UP

Ship Acct:

Buyer

Customer POID

Customer Tax #

Terms

Currency

FOB

Chantal Lavoie

10127-2607

Net 30

CAD

Destination-Collect

Line Total:

\$80.00

8

D4384-1P

Placard

4/1/2016

Yes

4/1/2016

18.00

Each

\$4.44

\$80.00

AS PER DWG D4384 REV. A
B143816

Sp/16-04-02

Line Total:

\$80.00

9

71401-45

PROCUREMENT
QUALITY CLAUSES

4/1/2016

No

4/1/2016

1.00

\$0.00

\$0.00

Procurement Quality Clauses

A005 RIGHT OF ENTRY

A007 FIRST ARTICLE INSPECTION (FAI) BY SELLER,
(DOCUMENTATION MAINTAINED BY SUPPLIER)

A013 SHELF LIFE CONTROLLED MATERIAL; 80% SHELF
LIFE REQUIRED AT RECEIPT

A026 CERTIFICATION OF MATERIAL CONFORMANCE

A040 NOTIFICATION OF QUALITY ESCAPE

A042 DART NOTIFICATION BY SUPPLIER

A043 RETENTION OF QUALITY DOCUMENTS

Line Total:

\$0.00

PO Total:

\$560.00

CL

Note: Terms & Condition of Purchasing(Suppliers) and Procurement Quality Clauses are an integral part of our AS9100 requirements. To learn in detail, please visit www.dartaerospace.com for further explanation.

Change Nbr:

2

Change Date: 3/29/2016

STUD!O

210 Main Street West
Hawkesbury, ON K6A 2H6
Phone # 613-632-2001

Invoice

Date	Invoice #
4/1/2016	42030

Invoice To

Dart Aerospace Ltd
1270 Aberdeen
Hawkesbury
Ontario
K6A 1K7

Ship To

P.O. No.	Terms	Rep	Ship	Via	F.O.B.	Project
31817			3/29/2016			

Quantity	Item	Description	Price Each	Amount
12	4005	D2268P.	6.67	80.04
12	4005	D2269P.	6.67	80.04
6	4005	D3671-1P.	13.33	79.98
6	4005	D3997.1P.	13.33	79.98
6	4005	D3997-5P.	13.33	79.98
6	4005	D3997-19P.	13.33	79.98
18	4005	D4384.1P.	4.44	79.92
Attn: Chantal				
Ref: 17430				

Sp/6-24-02

Subtotal

\$559.92

Sales Tax

\$72.79

Thank you for your business.

Total

\$632.71

******CERTIFICATE of CONFORMITY******

Customer:

Studio Lettrage

Purchase Order N°:

31817

Packing Slip N°:

wo # 17430

Part N°:

Serial N°:

Description: D2268P, D2269P,
D3671-1P, D3997-1P, D3997-6P,
D3997-19P, D4384-1P.

Quantity: 12, 12, 6, 6, 6, 6,
18.

Certification:

We hereby certify that:

1. The above listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;
2. All work was accomplished in accordance with the Dart Aerospace Purchase Order;
3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.

Authority:

Avery

APPROVAL: Valerie Young

Signature:

Val y

Title: office administrator

DATE:

April 01.16.

PRODUCT DATA SHEET



Avery® IPM™ 2031

issued: 01/04/2005

Introduction

Avery® IPM™ 2031 is a high quality pressure-sensitive vinyl film, designed for use on wide format inkjet printers. Avery® IPM™ 2031 has excellent printing properties, allowing crisp print quality with bright and vibrant colours. Avery® IPM™ 2031 offers rapid ink drying and a water-resistant material. It combines good adhesion during its life and easy removal afterwards.

Description

Facefilm: 80-micron premium white calendered, topcoated vinyl.
Adhesive: removable, acrylic based
Backing paper: one side coated kraft paper, 140 g/m²

Features

- Excellent printability
- Vibrant and bright colours
- Crisp print quality
- Spray water resistant with specific pigmented inks
- Good adhesion, excellent removability
- Warranty on outdoor durability

Recommendations for use

A wide variety of full-colour graphics for indoor - and **short/medium term outdoor** applications such as posters, murals, displays, exhibition stands, vehicle graphics etc. Avery® IPM™ 2031 is suitable for application to a wide variety of substrates and will remove cleanly for up to 1 year after application.

IPM media should be handled with care as any surface contamination may affect the print quality. Media should be processed in an environment of 15-25°C and 30-70% relative humidity. After drying, the finished prints should be wrapped in polyethylene film and despatched flat or rolled with the printed side facing outwards. To protect prints against water, UV/light and abrasion, overlamination with a clear film is recommended. For specific details of Avery® DOL combinations, refer to "Technical Bulletin 5.3. Recommended combinations of Avery® Overlaminates and Avery® Digital Print Media"

Always test your combination of Avery® IPM™ medium, inkjet printer and inks prior to commercial use.

Compatibility

Avery® IPM™ 2031 is compatible with a broad selection of inkjet printers, when printing with pigmented, water based inks. For specific details refer to "Technical Bulletin 5.6 Avery Dennison Inkjet Print Media - Printer compatibility".

Durability:

Avery® IPM™ 2031 is warranted for outdoor use in conjunction with pigmented outdoor inks from HP, Encad and Colorspan. The warranted period varies from type of application and type of overlaminate from 18 months up to 5 years. For full details, see our Avery® IPM™ Outdoor warranty.



www.averygraphics.com

Graphics Division
Rijndijk 86, P.O. Box 118
2394 ZG Hazerswoude - The Netherlands
Tel +31 71 3421500 - Fax +31 71 3421538

PRODUCT CHARACTERISTICS

Avery® IPM™ 2031

Physical properties

Features	Test method ¹	Results
Caliper, facefilm	ISO 534	80 µm
Gloss	ISO 2813, 20°	1%
Dimensional stability	DIN 30646	0.3 mm. max
Adhesion, initial	FINAT FTM-1, stainless steel	180 N/m
Adhesion, ultimate	FINAT FTM-1, stainless steel	260 N/m
Flammability		Self extinguishing
Accelerating ageing	DIN 53587, 500h exposure	No negative impact on film
Shelf life	Stored at 22° C/50-55 % RH	Performance
Removability		2 years
Not when applied to:		up to 1 year
Durability ²	Overlaminated with DOL 4300	5 years
	Overlaminated with DOL 1000, DOL 1100 with overlaps	3 years
	Overlaminated without overlaps for static applications only	2 years
	Without overlaminate and used for static, Non-abrasive application ONLY	18 months

Only when printed with ENCAD GO, HP and Colorsplan pigmented inks and when properly applied in accordance with our application instructions. Only applicable for vertical exposure.

Temperature range

Features	Results
Application temperature	Minimum: +10°C
Service temperature	-20°C to +80°C

Important

Information on physical and chemical characteristics is based upon tests we believe to be reliable. The values listed herein are typical values and are not for use in specifications. They are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material to their specific use. All technical data are subject to change. In case of any ambiguities or differences between the English and foreign versions of these Conditions, the English version shall be controlling.

Warranty

Avery® branded materials are manufactured under careful quality control and are warranted to be free from defect in material and workmanship. Any material shown to our satisfaction to be defective at the time of sale will be replaced without charge. Our aggregate liability to the purchaser shall in no circumstances exceed the cost of the defective materials supplied. No salesman, representative or agent is authorised to give any guarantee, warranty, or make any representation contrary to the foregoing. All Avery® branded materials are sold subject to the above conditions, being part of our standard conditions of sale, a copy of which is available on request.

1) Test methods

More information about our test methods can be found on our website.

2) Durability

The durability is based on middle European exposure conditions. Actual performance life will depend on substrate preparation, exposure conditions and maintenance of the marking. For instance, in the case of signs facing south; in areas of long high temperature exposure such as southern European countries; in industrially polluted areas or high altitudes, exterior performance will be decreased.



www.averygraphics.com

Graphics Division

Rijndijk 86, P.O. Box 118
2394 ZG Hazerswoude - The Netherlands
Tel +31 71 3421500 - Fax +31 71 3421538